





- 1 Open the top cover, take out the original cartridges. Before you install the CIS cartridges, please make clear the chip position and make sure that each color cartridge will be installed in the correct position. Install the CIS cartridges from left to right.

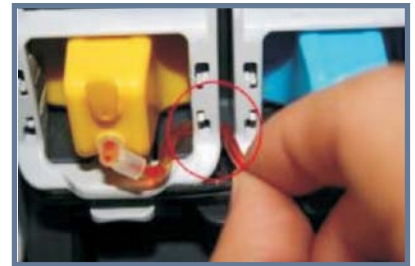

- 2 Close the top cover. Thread the tube through the cartridges clip. Tear the tubes among the cartridges about 2 cm it will be easier to install the color cartridges. Make sure the tube line between each two clips are not folded. Pull the tube slightly to see if it is installed well.

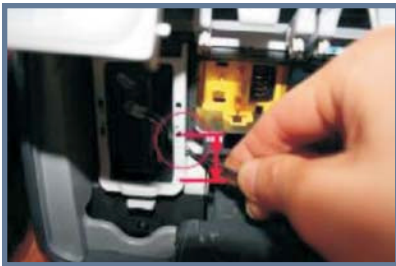

- 3 Install the other cartridges according to the above operations. Stick the support arm on the printer to fix the tube line. Installation finished.



For some models, the ink tanks also can be placed on the left of printer

If the indicator light flashing when printing, it tells that you need to reset the chip to full status. Please turn off your printer for about 30 seconds and switch it back on. Ink meter bar shall show full ink. You can start printing as usual.